

PRODUCT DATA SHEET

A) SPECIFICATIONS

- 1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).
- 2 Stainless Steel RSD safety clamp



B) OPERATING TEMPERATURE

Working temperature : -40°C +125°C.
Installation temperature : -20°C +60°C.

C) DELIVERY MODALITIES

Packing in boxes. Label indicating:
product code, article, quantity,
production batch, FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS
IT043

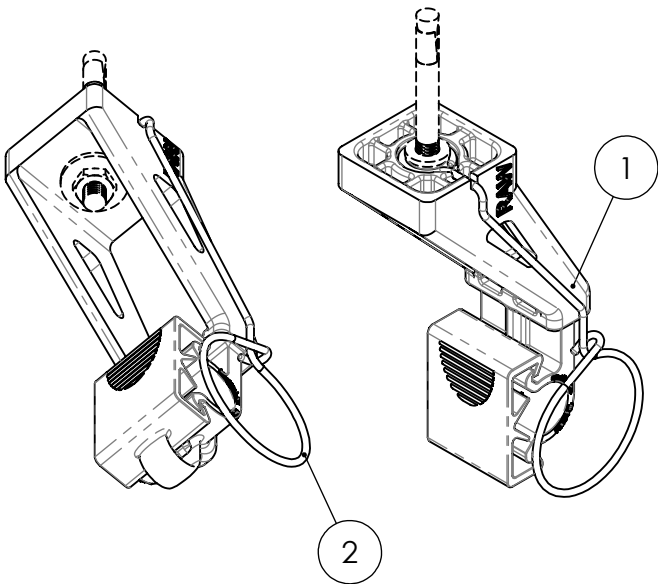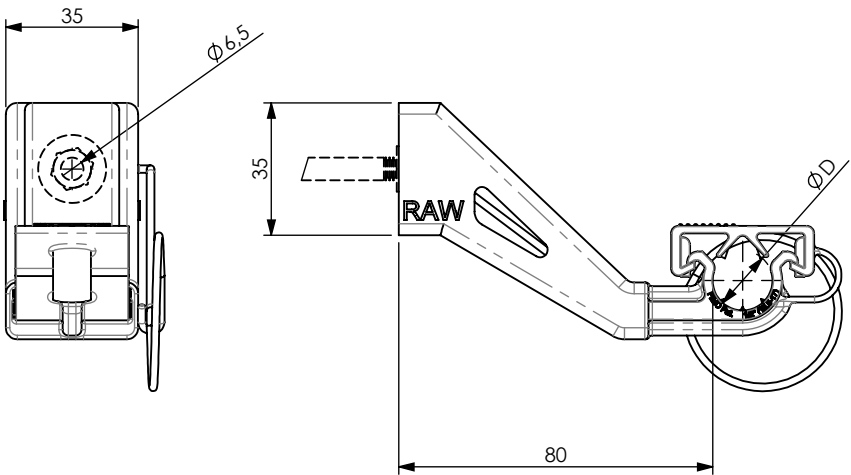

code	6150210012
article	RAW 1/2"-80 + RSD 1/2"-80

D		
15.5-17	50	0.0542kg

RI	DATE	DR	DATE	AP	<i>Description:</i> RAW 1/2"-80 + RSD 1/2"-80 Radiating Cable Clamps
02					
01					
00	05/12/2016	E.B.	05/12/2016	A.V.	
	1 ST EMISSION				
					<i>Use:</i> <i>Horizontal or vertical installation of radiating cables in tunnel</i> <i>* Suitable for installation in high speed railway tunnel application (350 km/h)</i>