


# RMC 114-B "A" Series

## PRODUCT DESCRIPTION

### RMC 114-B-HLFR "A" Series

Reference suffix <sup>(1)</sup> : -HLFR

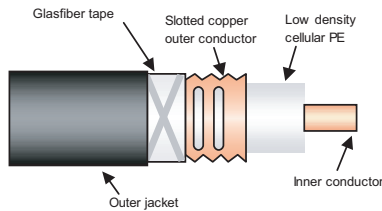

#### Fire behaviour

Halogen free and flame retardant outer sheath, Low corrosive gas emission acc. to IEC 60754-2  
 Flame retardant acc. to IEC 60332-1 and IEC 60332-3 cat. C, Low smoke emission acc. to IEC 61034<sup>(2)</sup>

Slots in the copper outer conductor allow a controlled portion of the internal RF energy to be radiated into the surrounding environment. Conversely, a signal transmitted near the cable will couple into the slots and be carried along the cable length.

## FEATURES and BENEFITS

- From 30 MHz to 2600 MHz with resonant frequencies
- Robust Cable, with low bending radius
- Main Applications: Tunnel - GSM, GSM-R, TETRA

## TECHNICAL FEATURES

• Size		1-1/4"
• Frequency Range	MHz	30 - 2600
• Recommended for Frequency	MHz	75 to 900
• Cable Type		RMC (Radiated Mode Cable)
• Jacket		HLFR (Halogen Free Low Smoke Flame Retardant) Anti Termite & Anti Rodent
• Slot Design		Groups of Slots at short intervals
• Impedance	$\Omega$	50 +/- 2
• Velocity Ratio	%	89
• Capacitance	pF/m	76
• Inner Conductor dc Resistance	$\Omega/1000\text{ m } (\Omega/1000\text{ ft})$	0.87 (0.26)
• Outer Conductor dc Resistance	$\Omega/1000\text{ m } (\Omega/1000\text{ ft})$	1.65 (0.50)
• Inner Conductor Material		Smooth copper tube
• Dielectric Material		Cellular polyethylene
• Outer Conductor Material		Overlapping corrugated copper foil with slot groups