


RMC 78

PRODUCT DESCRIPTION

RMC 78-HLFR

Reference suffix ⁽¹⁾ : -HLFR

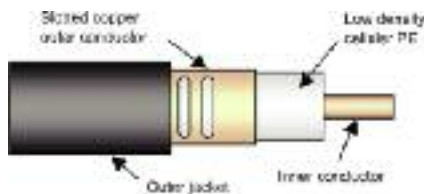

Fire behaviour

Halogen free and flame retardant outer sheath, Low corrosive gas emission acc. to IEC 60754-2
Flame retardant acc. to IEC 60332-1 and IEC 60332-3 cat. C, Low smoke emission acc. to IEC 61034

Slots in the copper outer conductor allow a controlled portion of the internal RF energy to be radiated into the surrounding environment. Conversely, a signal transmitted near the cable will couple into the slots and be carried along the cable length.

FEATURES and BENEFITS

- From 30 MHz to 2.8 GHz with resonant frequencies
- Robust Cable, with low bending radius
- Main Applications: Tunnel - FM, TETRA, GSM, DCS-1800, UMTS, WLAN

TECHNICAL FEATURES

• Size		7/8"
• Previous Model Number		522RC8RM-HLFR
• Frequency Range	MHz	30 - 2800
• Recommended for Frequency	MHz	900, 1800, 2200, 2400 and 2700
• Cable Type		RMC (Radiated Mode Cable)
• Jacket		HLFR (Halogen Free Low Smoke Flame Retardant)
• Slot Design		Groups of Slots at short intervals
• Impedance	Ω	50 +/- 2
• Velocity Ratio	%	88
• Capacitance	pF/m	76
• Inner Conductor dc Resistance	$\Omega/1000$ m ($\Omega/1000$ ft)	1.63 (0.49)
• Outer Conductor dc Resistance	$\Omega/1000$ m ($\Omega/1000$ ft)	1.50 (0.46)
• Inner Conductor Material		Smooth copper tube
• Dielectric Material		Cellular polyethylene
• Outer Conductor Material		Overlapping copper foil, with slot groups, bonded to the jacket